


## P.C. board plug-in connectors


Connector




3,50 mm

## Drawings

### PKB 1550/... /3,50

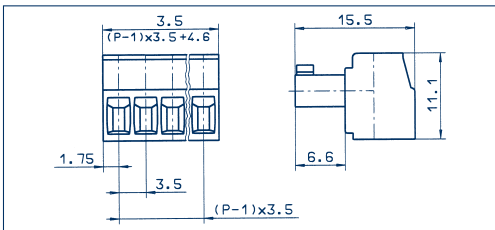

### PKB 1550/... /3,50-F

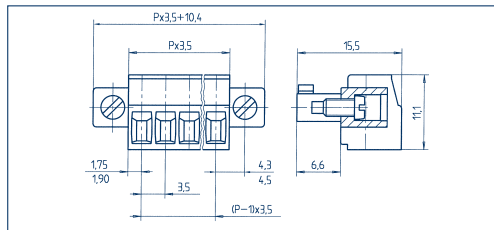

## Connection principle

### Dimensions

Spacing mm	3,50
Insulation stripping length mm	7,00
PCB hole diameter mm	-

### Connection data

Single wire (solid) mm <sup>2</sup>	1,50
Stranded wire (flexible) mm <sup>2</sup>	1,00
Stranded wire (with ferrules) mm <sup>2</sup>	1,00

### Output information

Rated voltage V	300 V	160 V
Rated current A	8 A	9 A (T60)
Cross section max. AWG/mm <sup>2</sup>	28-16	1,50
Rated surge voltage	-	4,00 kV
Rated torque/Screw size	-	0,4 Nm/M2
Contamination degree	-	3

### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	-
Contact pin	-
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	CuSn

### Order information

Standard colour(s)  
(further colours on request, see page 5)

## Strain-relief-clamp

Spacing mm	3,50
Insulation stripping length mm	7,00
PCB hole diameter mm	-
Single wire (solid) mm <sup>2</sup>	1,50
Stranded wire (flexible) mm <sup>2</sup>	1,00
Stranded wire (with ferrules) mm <sup>2</sup>	1,00

Rated voltage V	300 V	160 V
Rated current A	8 A	9 A (T60)
Cross section max. AWG/mm <sup>2</sup>	28-16	1,50
Rated surge voltage	-	4,00 kV
Rated torque/Screw size	-	0,4 Nm/M2
Contamination degree	-	3

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	-
Contact pin	-
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	CuSn

No. of poles	Cat.-No.	Qty.p.pck.
	●	
	green	
	(Ral 6018)	

2	11377.1	50
3	11378.1	50
4	11379.1	50
5	11380.1	50
6	11381.1	50
7	11382.1	50
8	11383.1	50
9	11384.1	50
10	11385.1	50
11	11386.1	50
12	11387.1	50
13	11388.1	50
14	11389.1	50
15	11390.1	50
16	11391.1	50
17	11392.1	50
18	11393.1	50
19	11394.1	50
20	11395.1	50

## Strain-relief-clamp

Spacing mm	3,50
Insulation stripping length mm	7,00
PCB hole diameter mm	-
Single wire (solid) mm <sup>2</sup>	1,50
Stranded wire (flexible) mm <sup>2</sup>	1,00
Stranded wire (with ferrules) mm <sup>2</sup>	1,00

Rated voltage V	300 V	160 V
Rated current A	8 A	9 A (T60)
Cross section max. AWG/mm <sup>2</sup>	28-16	1,50
Rated surge voltage	-	4,00 kV
Rated torque/Screw size	-	0,4 Nm/M2
Contamination degree	-	3

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	-
Contact pin	-
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	CuSn

No. of poles	Cat.-No.	Qty.p.pck.
	●	
	green	
	(Ral 6018)	

2	13717.1	50
3	13718.1	50
4	13719.1	50
5	13720.1	50
6	13721.1	50
7	13722.1	50
8	13723.1	50
9	13724.1	50
10	13725.1	50
11	13726.1	50
12	13727.1	50
13	13728.1	50
14	13729.1	50
15	13730.1	50
16	13731.1	50
17	13732.1	50
18	13733.1	50
19	13734.1	50
20	13980.1	50


## Accessories

Marking	Page 126 - 129
Coding	Page 124 - 125

Marking	Page 126 - 129
Coding	Page 124 - 125


## P.C. board plug-in connectors

Connector





3,81 mm

## PKB 1550/... /3,81

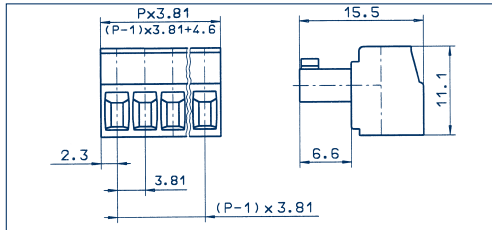

## PKB 1550/... /3,81-F

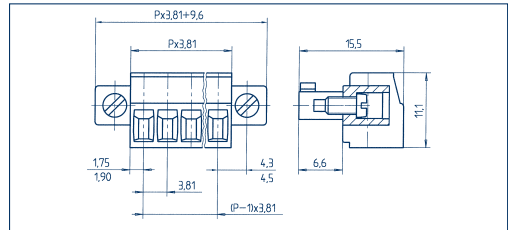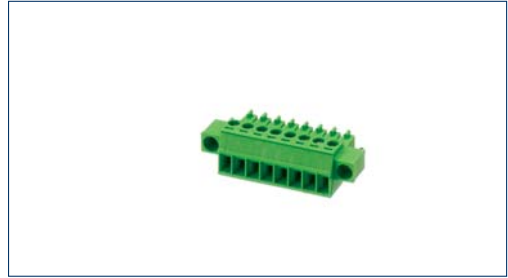

## Drawings

### Connection principle

#### Dimensions

Spacing mm	3,81
Insulation stripping length mm	7,00
PCB hole diameter mm	-

#### Connection data

Single wire (solid) mm <sup>2</sup>	1,50
Stranded wire (flexible) mm <sup>2</sup>	1,00
Stranded wire (with ferrules) mm <sup>2</sup>	1,00

#### Output information

	US	
Rated voltage V	300 V	160 V
Rated current A	8 A	9 A (T60)
Cross section max. AWG/mm <sup>2</sup>	28-16	1,50
Rated surge voltage	-	4,00 kV
Rated torque/Screw size	-	0,4 Nm/M2
Contamination degree	-	3

#### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	-
Contact pin	-
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	CuSn

#### Order information

Standard colour(s)  
(further colours on request, see page 5)

### Strain-relief-clamp

Spacing mm	3,81
Insulation stripping length mm	7,00
PCB hole diameter mm	-
Single wire (solid) mm <sup>2</sup>	1,50
Stranded wire (flexible) mm <sup>2</sup>	1,00
Stranded wire (with ferrules) mm <sup>2</sup>	1,00

	US	
Rated voltage V	300 V	160 V
Rated current A	8 A	9 A (T60)
Cross section max. AWG/mm <sup>2</sup>	28-16	1,50
Rated surge voltage	-	4,00 kV
Rated torque/Screw size	-	0,4 Nm/M2
Contamination degree	-	3

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	-
Contact pin	-
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	CuSn

#### Order information

No. of poles	Cat.-No.	Qty.p.pck.
	●	
	green	
	(Ral 6018)	
2	11396.1	50
3	11397.1	50
4	11398.1	50
5	11399.1	50
6	11400.1	50
7	11401.1	50
8	11402.1	50
9	11403.1	50
10	11404.1	50
11	11405.1	50
12	11406.1	50
13	11407.1	50
14	11408.1	50
15	11409.1	50
16	11410.1	50

### Strain-relief-clamp

Spacing mm	3,81
Insulation stripping length mm	7,00
PCB hole diameter mm	-
Single wire (solid) mm <sup>2</sup>	1,50
Stranded wire (flexible) mm <sup>2</sup>	1,00
Stranded wire (with ferrules) mm <sup>2</sup>	1,00

	US	
Rated voltage V	300 V	160 V
Rated current A	8 A	9 A (T60)
Cross section max. AWG/mm <sup>2</sup>	28-16	1,50
Rated surge voltage	-	4,00 kV
Rated torque/Screw size	-	0,25 Nm/M2
Contamination degree	-	3

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	-
Contact pin	-
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	CuSn

#### Order information

No. of poles	Cat.-No.	Qty.p.pck.
	●	
	green	
	(Ral 6018)	
2	13734.1	50
3	13735.1	50
4	13736.1	50
5	13737.1	50
6	13738.1	50
7	13739.1	50
8	13740.1	50
9	13741.1	50
10	13742.1	50
11	13743.1	50
12	13744.1	50
13	13745.1	50
14	13746.1	50
15	13747.1	50
16	13748.1	50


### Accessories

Marking	Page 126 - 129
Coding	Page 124 - 125

Marking	Page 126 - 129
Coding	Page 124 - 125

## P.C. board plug-in connectors


Connector




3,81 mm

## Drawings

### PKBZ 1551/... /3,81

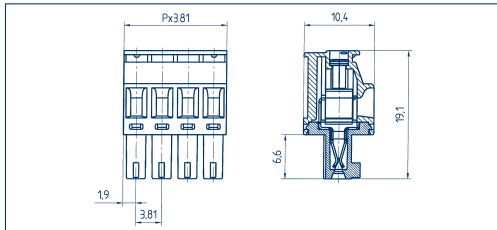

### PKBZ 1552/... /3,81

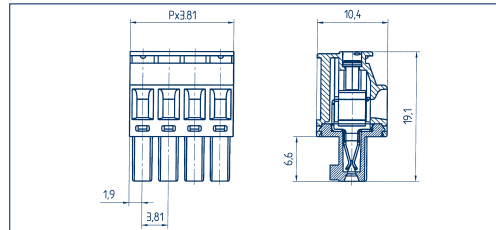

## Connection principle

### Dimensions

Spacing mm	3,81
Insulation stripping length mm	7,00
PCB hole diameter mm	-

### Connection data

Single wire (solid) mm <sup>2</sup>	1,50
Stranded wire (flexible) mm <sup>2</sup>	1,00
Stranded wire (with ferrules) mm <sup>2</sup>	1,00

### Output information

Rated voltage V	300 V	160 V
Rated current A	8 A	9 A (T60)
Cross section max. AWG/mm <sup>2</sup>	28-16	1,50
Rated surge voltage	-	4,00 kV
Rated torque/Screw size	-	0,4 Nm/M2
Contamination degree	-	3

### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	-
Contact pin	-
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	CuSn

### Order information

Standard colour(s)  
(further colours on request, see page 5)

## Strain-relief-clamp

Spacing mm	3,81	
Insulation stripping length mm	7,00	
PCB hole diameter mm	-	
Single wire (solid) mm <sup>2</sup>	1,50	
Stranded wire (flexible) mm <sup>2</sup>	1,00	
Stranded wire (with ferrules) mm <sup>2</sup>	1,00	
Rated voltage V	300 V	160 V
Rated current A	8 A	9 A (T60)
Cross section max. AWG/mm <sup>2</sup>	28-16	1,50
Rated surge voltage	-	4,00 kV
Rated torque/Screw size	-	0,4 Nm/M2
Contamination degree	-	3
Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0	
Temperature Range	-30°C / +105°C	
Clamping part	CuZn	
Clamping cage/Eccentric	-	
Contact pin	-	
Cage tension spring	-	
Wire protection	-	
Soldering lug	-	
Contact Spring	CuSn	

No. of poles	Cat.-No.	Qty.p.pck.
	●	
	green	
	(Ral 6018)	

2	13039.1	50
3	13040.1	50
4	13041.1	50
5	13042.1	50
6	13043.1	50
7	13044.1	50
8	13045.1	50
9	13046.1	50
10	13047.1	50
11	13048.1	50
12	13049.1	50
13	13050.1	50
14	13051.1	50
15	13052.1	50
16	13053.1	50
17	13054.1	50
18	13055.1	50
19	13056.1	50
20	13057.1	50

## Strain-relief-clamp

Spacing mm	3,81
Insulation stripping length mm	7,00
PCB hole diameter mm	-

Single wire (solid) mm <sup>2</sup>	1,50
Stranded wire (flexible) mm <sup>2</sup>	1,00
Stranded wire (with ferrules) mm <sup>2</sup>	1,00

Rated voltage V	300 V	160 V
Rated current A	8 A	9 A (T60)
Cross section max. AWG/mm <sup>2</sup>	28-12	1,50
Rated surge voltage	-	4,00 kV
Rated torque/Screw size	-	0,4 Nm/M2
Contamination degree	-	3

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	-
Contact pin	-
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	CuSn

No. of poles	Cat.-No.	Qty.p.pck.
	●	
	green	
	(Ral 6018)	

2	13062.1	50
3	13063.1	50
4	13064.1	50
5	13065.1	50
6	13066.1	50
7	13067.1	50
8	13068.1	50
9	13069.1	50
10	13070.1	50
11	13071.1	50
12	13072.1	50
13	13073.1	50
14	13074.1	50
15	13075.1	50
16	13076.1	50
17	13077.1	50
18	13078.1	50
19	13079.1	50
20	13080.1	50

## Accessories

Marking	Page 126 - 129
Coding	Page 124 - 125

Marking	Page 126 - 129
Coding	Page 124 - 125


## P.C. board plug-in connectors

Connector




5,00 mm

## PKB 950/... /5,00

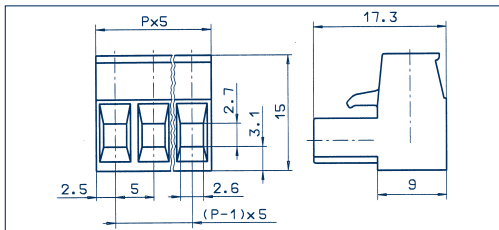

## PKB 950/... /5,00-F

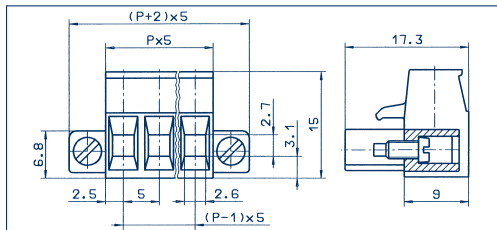

## Drawings

### Connection principle

#### Dimensions

Spacing mm	5,00
Insulation stripping length mm	6,00
PCB hole diameter mm	-

#### Connection data

Single wire (solid) mm <sup>2</sup>	2,50
Stranded wire (flexible) mm <sup>2</sup>	2,50
Stranded wire (with ferrules) mm <sup>2</sup>	2,50

#### Output information

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	22-12	2,50
Rated surge voltage	-	4,00 kV
Rated torque/Screw size	-	0,50 Nm/M3
Contamination degree	-	3

#### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	-
Contact pin	-
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	CuSn

#### Order information

Standard colour(s)

(further colours on request, see page 5)

### Strain-relief-clamp

Spacing mm	5,00
Insulation stripping length mm	6,00
PCB hole diameter mm	-
Single wire (solid) mm <sup>2</sup>	2,50
Stranded wire (flexible) mm <sup>2</sup>	2,50
Stranded wire (with ferrules) mm <sup>2</sup>	2,50

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	22-12	2,50
Rated surge voltage	-	4,00 kV
Rated torque/Screw size	-	0,50 Nm/M3
Contamination degree	-	3

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	-
Contact pin	-
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	CuSn

#### Order information

No. of poles

green

(Ral 6018)

No. of poles	Cat.-No.	Qty.p.pck.
2	11207.1	50
3	11208.1	50
4	11209.1	50
5	11210.1	50
6	11211.1	50
7	11212.1	50
8	11213.1	50
9	11214.1	50
10	11215.1	50
11	11216.1	50
12	11217.1	50
13	11218.1	50
14	11219.1	50
15	11220.1	50
16	11221.1	50
17	11222.1	50
18	11223.1	50
19	11224.1	50
20	11225.1	50
21	11226.1	50
22	11227.1	50
23	11228.1	50
24	11229.1	50

### Strain-relief-clamp

Spacing mm	5,00
Insulation stripping length mm	6,00
PCB hole diameter mm	-
Single wire (solid) mm <sup>2</sup>	2,50
Stranded wire (flexible) mm <sup>2</sup>	2,50
Stranded wire (with ferrules) mm <sup>2</sup>	2,50

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	28-14	2,50
Rated surge voltage	-	4,00 kV
Rated torque/Screw size	-	0,50 Nm/M3
Contamination degree	-	3

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	-
Contact pin	-
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	CuSn

#### Order information

No. of poles

green

(Ral 6018)

No. of poles	Cat.-No.	Qty.p.pck.
2	11268.1	50
3	11269.1	50
4	11270.1	50
5	11271.1	50
6	11272.1	50
7	11273.1	50
8	11274.1	50
9	11275.1	50
10	11276.1	50
11	13226.1	50
12	13227.1	50
13	13228.1	50
14	13229.1	50
15	13230.1	50
16	13231.1	50
17	13232.1	50
18	13233.1	50
19	13234.1	50
20	13235.1	50
21	13236.1	50
22	13237.1	50
23	13238.1	50
24	13239.1	50

### Accessories

Marking	Page 126 - 129
Coding	Page 124 - 125

Marking	Page 126 - 129
Coding	Page 124 - 125




### P.C. board plug-in connectors

Connector




5,08 mm

### PKB 950/... /5,08

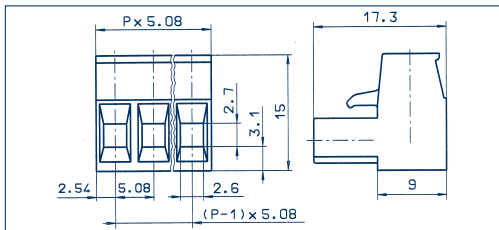

### PKB 950/... /5,08-F

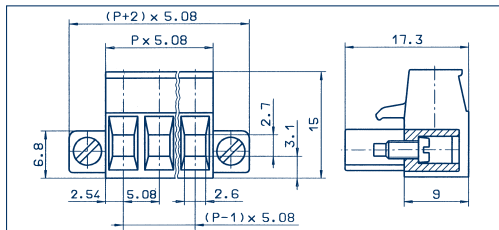

### Drawings

### Connection principle

#### Dimensions

Spacing mm	5,08
Insulation stripping length mm	6,00
PCB hole diameter mm	-

#### Connection data

Single wire (solid) mm <sup>2</sup>	2,50
Stranded wire (flexible) mm <sup>2</sup>	2,50
Stranded wire (with ferrules) mm <sup>2</sup>	2,50

#### Output information

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	22-12	2,50
Rated surge voltage	-	4,00 kV
Rated torque/Screw size	-	0,50 Nm/M3
Contamination degree	-	3

#### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	-
Contact pin	-
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	CuSn

#### Order information

Standard colour(s)  
(further colours on request, see page 5)

### Strain-relief-clamp

Spacing mm	5,08	
Insulation stripping length mm	6,00	
PCB hole diameter mm	-	
Single wire (solid) mm <sup>2</sup>	2,50	
Stranded wire (flexible) mm <sup>2</sup>	2,50	
Stranded wire (with ferrules) mm <sup>2</sup>	2,50	
Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	22-12	2,50
Rated surge voltage	-	4,00 kV
Rated torque/Screw size	-	0,50 Nm/M3
Contamination degree	-	3

PA 6.6 V0 / UL 94 V0

-30°C / +105°C

CuZn

-

-

-

-

-

-

CuSn

●

green

(Ral 6018)

11230.1

50

11231.1

50

11232.1

50

11233.1

50

11234.1

50

11235.1

50

11236.1

50

11237.1

50

11238.1

50

11239.1

50

11240.1

50

11241.1

50

11242.1

50

11243.1

50

11244.1

50

11245.1

50

11246.1

50

11247.1

50

11248.1

50

11249.1

50

11250.1

50

11251.1

50

11252.1

50

### Strain-relief-clamp

Spacing mm	5,08	
Insulation stripping length mm	6,00	
PCB hole diameter mm	-	
Single wire (solid) mm <sup>2</sup>	2,50	
Stranded wire (flexible) mm <sup>2</sup>	2,50	
Stranded wire (with ferrules) mm <sup>2</sup>	2,50	
Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	28-14	2,50
Rated surge voltage	-	4,00 kV
Rated torque/Screw size	-	0,50 Nm/M3
Contamination degree	-	3

PA 6.6 V0 / UL 94 V0

-30°C / +105°C

CuZn

-

-

-

-

-

-

CuSn

●

green

(Ral 6018)

11277.1

50

11278.1

50

11279.1

50

11280.1

50

11281.1

50

11282.1

50

11283.1

50

11284.1

50

11285.1

50

13212.1

50

13213.1

50

13214.1

50

13215.1

50

13216.1

50

13217.1

50

13218.1

50

13219.1

50

13220.1

50

13221.1

50

13222.1

50

13223.1

50

13707.1

50

13708.1

50


### Accessories

Marking	Page 126 - 129
Coding	Page 124 - 125

Marking	Page 126 - 129
Coding	Page 124 - 125

## P.C. board plug-in connectors


Connector




5,08 mm

## Drawings

### PKB 1100/... /5,08

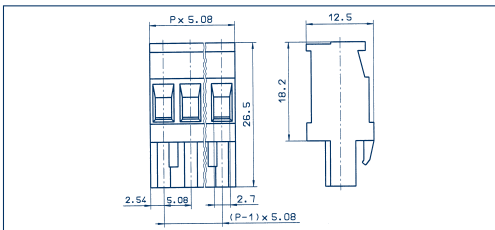

### PKB 1110/... /5,08

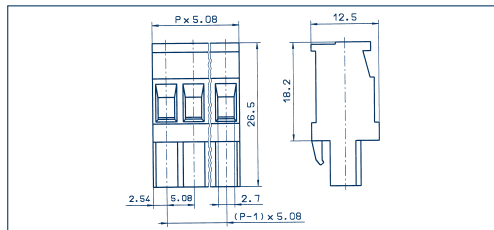

## Connection principle

### Dimensions

Spacing mm	5,08
Insulation stripping length mm	7,00
PCB hole diameter mm	-

### Connection data

Single wire (solid) mm <sup>2</sup>	2,50
Stranded wire (flexible) mm <sup>2</sup>	2,50
Stranded wire (with ferrules) mm <sup>2</sup>	2,50

### Output information

Rated voltage V	300 V	250 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	22-10	2,50
Rated surge voltage	-	4,00 kV
Rated torque/Screw size	-	0,50 Nm/M3
Contamination degree	-	3

### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	-
Contact pin	-
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	CuSn

### Order information

Standard colour(s)  
(further colours on request, see page 5)

		●	
		green	
		(Ral 6018)	
	2	11305.1	50
	3	11306.1	50
	4	11307.1	50
	5	11308.1	50
	6	11309.1	50
	7	11310.1	50
	8	11311.1	50
	9	11312.1	50
	10	11313.1	50
	11	11314.1	50
	12	11315.1	50
	13	11316.1	50
	14	11317.1	50
	15	11318.1	50
	16	11319.1	50

## Strain-relief-clamp

## Strain-relief-clamp

No. of poles	Cat.-No.	Qty.p.pck.
	●	
	green	
	(Ral 6018)	
2	11305.1	50
3	11306.1	50
4	11307.1	50
5	11308.1	50
6	11309.1	50
7	11310.1	50
8	11311.1	50
9	11312.1	50
10	11313.1	50
11	11314.1	50
12	11315.1	50
13	11316.1	50
14	11317.1	50
15	11318.1	50
16	11319.1	50

No. of poles	Cat.-No.	Qty.p.pck.
	●	
	green	
	(Ral 6018)	
2	11339.1	50
3	11340.1	50
4	11341.1	50
5	11342.1	50
6	11343.1	50
7	11344.1	50
8	11345.1	50
9	11346.1	50
10	11347.1	50
11	11348.1	50
12	11349.1	50
13	11350.1	50
14	11351.1	50
15	11352.1	50
16	11353.1	50

## Accessories

Marking	Page 126 - 129
Coding	Page 124 - 125

Marking	Page 126 - 129
Coding	Page 124 - 125


## P.C. board plug-in connectors

Connector



7,62 mm

## PKB 960/... /7,62

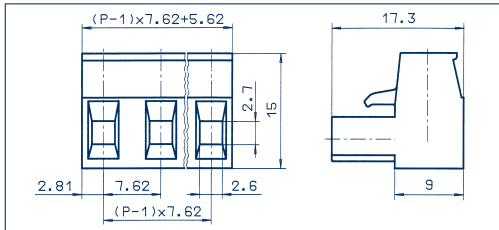

## Drawings

### Connection principle

#### Dimensions

Spacing mm	7,62
Insulation stripping length mm	6,00
PCB hole diameter mm	-

#### Connection data

Single wire (solid) mm <sup>2</sup>	2,50
Stranded wire (flexible) mm <sup>2</sup>	2,50
Stranded wire (with ferrules) mm <sup>2</sup>	2,50

#### Output information

Rated voltage V	300 V	400 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm <sup>2</sup>	28-12	2,50
Rated surge voltage	-	6,00 kV
Rated torque/Screw size	-	0,50 Nm/M3
Contamination degree	-	3

#### Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	-
Contact pin	-
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	CuSn

#### Order information

	No. of poles	Cat.-No.	Qty.p.pck.
Standard colour(s)		● green	
(further colours on request, see page 5)		(Ral 6018)	
	2	11253.1	50
	3	11254.1	50
	4	11255.1	50
	5	11256.1	50
	6	11257.1	50
	7	11258.1	50
	8	11259.1	50
	9	11260.1	50
	10	11261.1	50
	11	11262.1	50
	12	11263.1	50
	13	11264.1	50
	14	11265.1	50
	15	11266.1	50
	16	11267.1	50

#### Accessories

Marking	Page 126 - 129
Coding	Page 124 - 125