



P.C. board plug-in connectors

Connector



PZB 3950/... /5,00

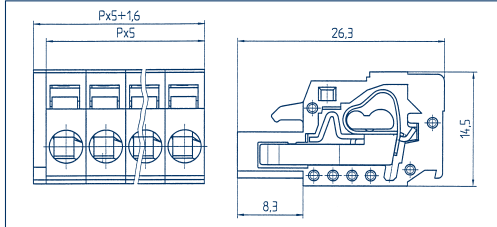

Drawings

Connection principle

Dimensions

Spacing mm
Insulation stripping length mm
PCB hole diameter mm

Connection data

Single wire (solid) mm²
Stranded wire (flexible) mm²
Stranded wire (with ferrules) mm²

Output information

Rated voltage V
Rated current A
Cross section max. AWG/mm²
Rated surge voltage
Rated torque/Screw size
Contamination degree

Materials

Insulating material/Flammability class
Temperature Range
Clamping part
Clamping cage/Eccentric
Contact pin
Cage tension spring
Wire protection
Soldering lug
Contact Spring

Order information

Standard colour(s)
(further colours on request, see page 5)

Strain-relief-clamp

5,00
8,50
-
2,50
2,50
1,50



300 V

15 A

28-12

-

-

-



250 V

12 A (T60)

2,50

4,00 kV

-

3

PA 6.6 V0 / UL 94 V0
-30°C / +105°C

-

-

-

stainless steel

-

-

CuSn


No. of poles	Cat.-No.	Qty.p.pck.
	● green (Ral 6018)	
2	11412.1	50
3	11413.1	50
4	11414.1	50
5	11415.1	50
6	11416.1	50
7	11417.1	50
8	11418.1	50
9	11419.1	50
10	11420.1	50
11	11421.1	50
12	11422.1	50
13	11423.1	50
14	11424.1	50
15	11425.1	50
16	11426.1	50
17	11427.1	50
18	11428.1	50
19	11429.1	50
20	11430.1	50
21	11431.1	50
22	11432.1	50
23	11433.1	50
24	11434.1	50

Accessories

Marking Page 126 - 129
Coding Page 124 - 125

P.C. board plug-in connectors

Connector




5,08 mm

PBT 1200/... /5,08



Drawings

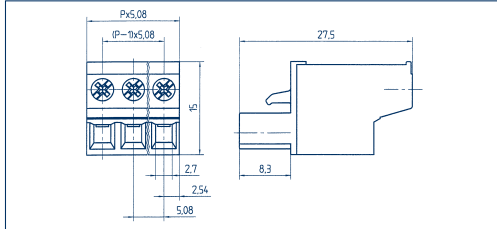

Connection principle

Dimensions

Spacing mm
Insulation stripping length mm
PCB hole diameter mm

Connection data

Single wire (solid) mm²
Stranded wire (flexible) mm²
Stranded wire (with ferrules) mm²

Output information

Rated voltage V
Rated current A
Cross section max. AWG/mm²
Rated surge voltage
Rated torque/Screw size
Contamination degree

Materials

Insulating material/Flammability class
Temperature Range
Clamping part
Clamping cage/Eccentric
Contact pin
Cage tension spring
Wire protection
Soldering lug
Contact Spring

Order information

Standard colour(s)
(further colours on request, see page 5)

Eccentric-top

5,08
10,00
-
2,50
2,50
2,50



300 V

15 A

22-12

-

-

-



250 V

12 A (T60)

2,50

4,00 kV

0,50 Nm/M3

3

PA 6.6 V0 / UL 94 V0
-30°C / +105°C

-
Fe/Fe
-
-
-
-

CuSn


No. of poles	Cat.-No.	Qty.p.pck.
	● green (Ral 6018)	
2	11354.1	50
3	11355.1	50
4	11356.1	50
5	11357.1	50
6	11358.1	50
7	11359.1	50
8	11360.1	50
9	11361.1	50
10	11362.1	50
11	11363.1	50
12	11364.1	50
13	11365.1	50
14	11366.1	50
15	11367.1	50
16	11368.1	50
17	11369.1	50
18	11370.1	50
19	11371.1	50
20	11372.1	50
21	11373.1	50
22	11374.1	50
23	11375.1	50
24	11376.1	50

Accessories

Marking Page 126 - 129
Coding Page 124 - 125



P.C. board plug-in connectors

Connector





3,50 mm

PKB 4350/... /3,50

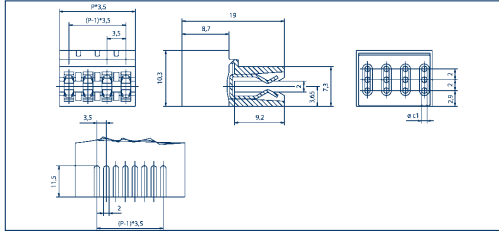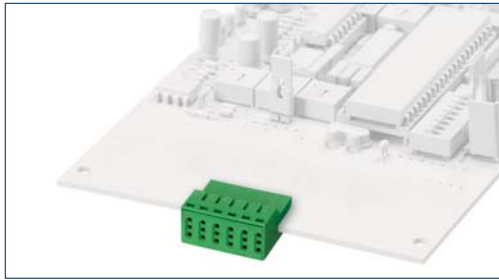

PKB 4350/... /3,50-G

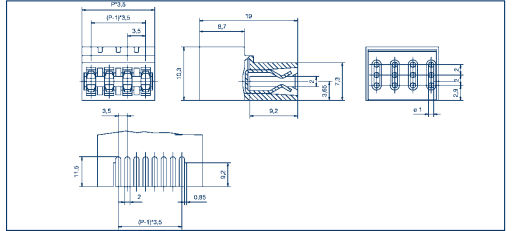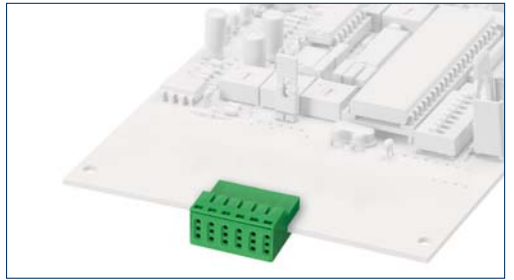

Drawings

Connection principle

Dimensions

Spacing mm
Insulation stripping length mm
PCB hole diameter mm

Connection data

Single wire (solid) mm²
Stranded wire (flexible) mm²
Stranded wire (with ferrules) mm²

Output information

Rated voltage V
Rated current A
Cross section max. AWG/mm²
Rated surge voltage
Rated torque/Screw size
Contamination degree

Materials

Insulating material/Flammability class
Temperature Range
Clamping part
Clamping cage/Eccentric
Contact pin
Cage tension spring
Wire protection
Soldering lug
Contact Spring

Order information

Standard colour(s)
(further colours on request, see page 5)

Leg-spring

3,50

8,50

—

0,50



150 V

5 A

22-20

—

—

—

—



160 V

6 A (T60)

0,50

2,50 kV

—

—

3

PA 6.6 V0 / UL 94 V0
-30°C / +105°C

—

—

—

—

stainless steel

—

—

—

Cu

No. of poles

Cat.-No.

Qty.p.pck.



green
(Ral 6018)

2

13957.1

50

3

13958.1

50

4

13959.1

50

5

13960.1

50

6

13961.1

50

7

13962.1

50

8

13963.1

50

9

13964.1

50

10

13965.1

50

11

13966.1

50

12

13967.1

50

Leg-spring

3,50

8,50

—

0,50

150 V

5 A

22-20

—

—

—

—

160 V

6 A (T60)

0,50

2,50 kV

—

—

3

PA 6.6 V0 / UL 94 V0
-30°C / +105°C

—

—

—

—

stainless steel

—

—

—

Cu

No. of poles

Cat.-No.

Qty.p.pck.



green
(Ral 6018)

2

13968.1

50

3

13969.1

50

4

13970.1

50

5

13971.1

50

6

13972.1

50

7

13973.1

50

8

13974.1

50

9

13975.1

50

10

13976.1

50

11

13977.1

50

12

13978.1

50

Accessories

Marking
Coding

Page 126 - 129
Page 124 - 125

Page 126 - 129
Page 124 - 125